

LOCTITE® PC 7227™

Known as LOCTITE® 7227™ or LOCTITE® Brushable Ceramic Grey
July 2022

Product description

LOCTITE® PC 7227™ provides the following product characteristics:

Technology	Epoxy
Chemical type	Epoxy
Appearance (resin)	Grey
Appearance (hardener)	Amber
Components	Two part - Resin & Hardener
Mix Ratio, by weight -Part A: Part B	4.8 : 1
Mix Ratio, by volume -Part A: Part B	2.75 : 1
Cure	Room temperature cure after mixing
Application	Coating
Application temperature	20°C to 30°C (68°F to 86°F)
Service temperature (dry)	100°C (212°F)
Service temperature (wet)	90°C (194°F)
Specific benefits	<ul style="list-style-type: none"> • Ceramic and silicon carbide filled - to provide maximum protection. • Ultra-smooth brushable consistency. • Easy to mix and use. • Reduces downtime. • Superior adhesion - forms a solid bond.

LOCTITE® PC 7227™ is an ultra-smooth, ceramic reinforced brushable epoxy coating that is solvent-free with lower viscosity for a thinner coating. It is designed to protect surfaces against turbulence, chemicals, abrasive and corrosive agents. Its high gloss, low friction surface can be used to restore or increase pump efficiency and also works as a top coat over Loctite Wearing Compounds for application requiring rebuilding and longer lasting protection. Typical applications are rebuilding or resurfacing pump impellers, housings, pipe walls and elbows, valve bodies, repairing and protecting heat exchangers, condensers, lining tanks, chutes, resurfacing and repairing rudders and pintel housings.

Typical properties of uncured material

Resin

Density @25°C, ISO 1675, g/cm ³ (lbs/gal)	1.7 to 1.8 (14.35 to 14.85 ^{LMS})
Viscosity, Brookfield- RV, 25°C, mPa·s (cP) Spindle 7, speed 10 rpm	200,000 to 260,000 ^{LMS}

Hardener

Density @25°C, ISO 1675, g/cm ³ (lbs/gal)	1 to 1.1 (8.6 to 8.9 ^{LMS})
Viscosity, Brookfield- RV, 25°C, mPa·s (cP) Spindle 2, speed 20 rpm	500 to 900 ^{LMS}

Mixed properties

Density @ 25°C, ISO 1675, g/cm ³ (lbs/gal)	1.4 (11.7)
Viscosity @ 25°C, mPa·s (cP)	20,000
Viscosity, Cone & Plate, Shear rate, 10 s ⁻¹	
Vertical sag Resistance, ISO 16862, 25 °C, μm	92


Typical curing performance

Curing properties

Gel Time, ASTM D2471, minutes	34 to 48
Recoat time @ 25°C, hours	1 to 3

Cure speed vs. temperature

The graph below shows the shear strength developed with time on grit blasted mild steel and aluminum lap shears and tested according to ISO 4587.

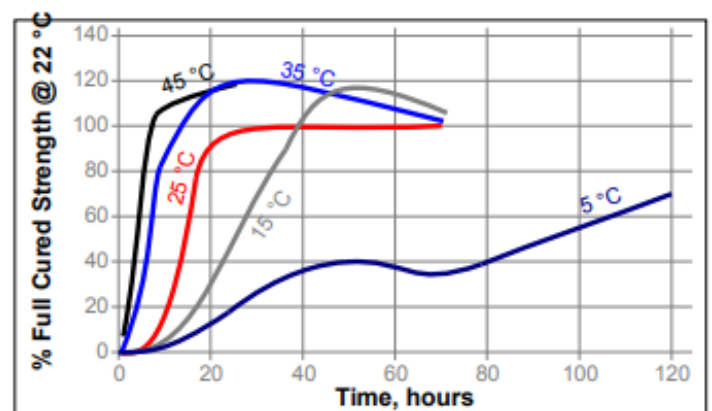

Typical properties of cured material

Cured for 7 days @ 22°C

Physical properties:

Tensile strength, ISO 527-2	N/mm ² (psi)	27.3 (3,960)
Tensile modulus, ISO 527-2	N/mm ² (psi)	5,813 (843,000)
Glass transition temperature (T _g), °C TMA, ISO 11359-2		51
Heat deflection temperature, ASTM D648, °C		57.8
Coefficient of thermal expansion, ISO 11359-2, K ⁻¹ :		
Below T _g		50×10 ⁻⁰⁶
Above T _g		135×10 ⁻⁰⁶
Shore hardness ISO 868, Durometer D		85
Elongation, ASTM D638, %		2
Volume shrinkage, ISO 1675, %		19.6

Abrasion properties:

Miller wear resistance, Volume lost, mm ³ (ASTM G75, alumina F220, 6 hour test)		1,430
Taber test, Volume lost, mm ³ (ASTM D4060, Wheel CS-17, 1kg, 1000 cycles)		63

Electrical properties:

Dielectric strength, ASTM D149, kV/mm		7.57
Surface resistivity, IEC 60093, Ω		0.6×10 ¹⁵
Volume resistivity, IEC 60093, Ω·cm		2.0×10 ¹⁴

Adhesive properties:

Lap Shear Strength, ISO 4587:		
Aluminum	N/mm ² (psi)	8.4 (1,220)
Mild steel (grit blasted)	N/mm ² (psi)	22.2 (3,220)
Stainless steel	N/mm ² (psi)	16.8 (2,440)

Typical environmental resistance

Dry service temperature resistance, CSA-Z245.20-06/CSA-Z245.21-06 Rating 2°C		110
--	--	-----

After storage in hot air for 28 days at 110°C the coating applied on a metal panel:

Rating 2: less than 50% can be removed

Tables below show chemical resistance @ 25°C, immersed up to 5000 hrs.

Acids

40% Sulphuric acid Continuous long term immersion

Alkalis

25% Ammonium hydroxide Continuous long term immersion

Solvents

100 % Deionized water	Continuous long term immersion
10% Salt water	Continuous long term immersion
100% Methanol	Short term or intermittent immersion
100% Acetone	Spill, splash with immediate cleanup

Hydrocarbons

100% Kerosene	Continuous long term immersion
100% Petrol unleaded	Continuous long term immersion

General information

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Material Safety Data Sheet.

Directions for use**Surface preparation**

Proper surface preparation is critical to the long-term performance of this product. The exact requirements vary with the severity of the application, expected service life, and initial substrate conditions.

1. Remove dirt, oil, grease etc with a suitable cleaner, e.g. high-pressure water cleaning system using Loctite®7840™ or Loctite® Natural Blue® cleaner/degreaser.
2. All skip welds, weld spatter, buckshot, and other surface roughness must be ground down; undercuts and pinholes must be ground and filled. All projections, edges, high points, and fillets must be ground to radius of at least 3 mm and all corners must be likewise rounded to maximize product performance.
3. Blast all surfaces to be coated with a sharp edged angular grit to a depth of profile of 75 to 100 microns (3 to 4 mils), and a degree of cleanliness of Near White Metal (SIS SA 2½ /SSPC-SP 10). For immersion service, a degree of cleanliness of White Metal (SIS SA 3/SSPC-SP 5) is required.
4. After blasting, the metal surface should be cleaned with a residue-free cleaner or solvent to remove dust and contaminants. Clean, dry compressed air may also be used to remove dust and contaminants. The surface should be coated before any new oxidation occurs.
5. Metal that has been in contact with salt solutions, e.g. seawater, should be grit blasted and high-pressure water blasted, left for 24 hours to allow any salts in the metal to sweat to the surface. A test for chloride contamination should be performed. The procedure should be repeated until chloride concentration on the surface is below 40 ppm.



Application

1. Measure 4.8 parts of resin and 1 part of hardener by weight or mix entire kit thoroughly until color is consistent.
2. Film thickness per coat: 250 to 500 microns (10 to 20 mils). Minimum of 2 coats is recommended to avoid any pin holes. Layering of two different colors may be used as a wear indicator for re-application.
3. Multiple coat application may be carried out, If final thickness cannot be achieved with one application. If this time has elapsed, light abrasive blasting is required, followed by a solvent wash to remove any abrasive residues.
4. Apply material to prepared surface by first forcing a thin layer deep into the texture of the substrate.
5. Then immediately build up to the desired finished thickness.

Technical tips for working with epoxies**Environmental conditions**

- Relative humidity: <85%
- Ambient temperature: >15°C (60°F) and rising
- Substrate temperature must always be 3°C (7°F) higher than the dew point to avoid condensing moisture on parts.

Working time and cure speed depends on temperature and mass:

- The higher the temperature, the faster the cure.
- The larger the mass of material, the faster the cure.

To speed the cure of epoxies at low temperatures:

- Store epoxy at room temperature or warm resin/hardener component(s) prior to mixing. Never use open flame.
- Pre-heat repair surface until warm to the touch.
- Tent working area to achieve suitable environmental conditions.

To slow the cure of epoxies at high temperatures:

- Store epoxy at room temperature or cool resin/hardener component(s) prior to mixing.
- Work during cool, morning hours and shade area from direct sun.

Inspection

1. Visually inspect for pinholes and voids just after application.
2. Once the coating has cured, repeat visual inspection to confirm absence of pinholes, voids, or damaged areas.
3. Control thickness of the coating, especially in the critical points.
4. Perform a test with a holiday detector to confirm coating continuity.

Color

Color variation is possible between the batches and will not affect the performance of the product.

Coverage

To achieve a 0.8 millimeter (15.7 mils) thickness, the coverage rate will be 0.8 m² (8.6 ft²) for 1 kg (2.2 lb), excluding overthickness, repairs, etc.

Repairs

Any voids, pinholes, low thickness areas found in the coating should be repaired by lightly abrading, cleaning and applying further product.

Clean-up

Immediately after use clean tools with suitable cleaner, e.g. LOCTITE® SF 7365 or a solvent such as acetone or isopropyl alcohol. Once cured, the material can only be removed mechanically.

Loctite material specification^{LMS}

LMS dated (Resin) and LMS dated (Hardener). Test reports for each batch are available for the indicated properties. LMS test reports include selected QC test parameters considered appropriate to specifications for customer use. Additionally, comprehensive controls are in place to assure product quality and consistency. Additionally, comprehensive controls are in place to assure product quality and consistency.

Storage

Store product in the unopened container in a dry location. Storage information may be indicated on the product package labeling.

Optimal Storage: 8°C to 21°C. Storage below 8°C or greater than 28°C can adversely affect product properties.

Material removed from containers may be contaminated during use. Do not return product to the original container. Henkel Corporation cannot assume responsibility for product which has been contaminated or stored under conditions other than those previously indicated. If additional information is required, please contact your local Henkel representative.

Conversions

(°C x 1.8) + 32 = °F
 kV/mm x 25.4 = V/mil
 mm / 25.4 = inches
 μm / 25.4 = mil
 N x 0.225 = lb
 N/mm x 5.71 = lb/in
 N/mm² x 145 = psi
 MPa x 145 = psi
 N·m x 8.851 = lb·in
 N·m x 0.738 = lb·ft
 N·mm x 0.142 = oz·in
 mPa·s = cP



Disclaimer

The information provided in this Technical data sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. The product can have a variety of different applications as well as differing application and working conditions in your environment that are beyond our control. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product. Any liability in respect of the information in the Technical data sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

In case products are delivered by Henkel Belgium NV, Henkel Electronic Materials NV, Henkel Nederland BV, Henkel Technologies France SAS and Henkel France SA please additionally note the following:

In case Henkel would be nevertheless held liable, on whatever legal ground, Henkel's liability will in no event exceed the amount of the concerned delivery.

In case products are delivered by Henkel Colombiana, S.A.S. the following disclaimer is applicable:

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product. Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

In case products are delivered by Henkel Corporation, or Henkel Canada Corporation, the following disclaimer is applicable:

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, **Henkel Corporation specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Henkel Corporation's products. Henkel Corporation specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits.** The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

Trademark usage

Except as otherwise noted, all trademarks in this document are trademarks of Henkel Corporation in the U.S. and elsewhere. ® denotes a trademark registered in the U.S. Patent and Trademark Office.

Reference 1